

**Doc 9977**  
**AN/489**



# **Manual on Civil Aviation Jet Fuel Supply**

---

Approved by the Secretary General  
and published under his authority

First Edition — 2012

International Civil Aviation Organization



Doc 9977  
AN/489



# Manual on Civil Aviation Jet Fuel Supply

---

**Approved by the Secretary General  
and published under his authority**

**First Edition — 2012**

**International Civil Aviation Organization**

Published in separate English, Arabic, Chinese, French, Russian  
and Spanish editions by the  
INTERNATIONAL CIVIL AVIATION ORGANIZATION  
999 University Street, Montréal, Quebec, Canada H3C 5H7

For ordering information and for a complete listing of sales agents  
and booksellers, please go to the ICAO website at [www.icao.int](http://www.icao.int)

*First edition 2012*

**Doc 9977, *Manual on Civil Aviation Jet Fuel Supply***

Order Number: 9977

ISBN 978-92-9249-105-5

© ICAO 2012

All rights reserved. No part of this publication may be reproduced, stored in a  
retrieval system or transmitted in any form or by any means, without prior  
permission in writing from the International Civil Aviation Organization.

## AMENDMENTS

Amendments are announced in the supplements to the *Catalogue of ICAO Publications*; the Catalogue and its supplements are available on the ICAO website at [www.icao.int](http://www.icao.int). The space below is provided to keep a record of such amendments.

### RECORD OF AMENDMENTS AND CORRIGENDA

AMENDMENTS		
No.	Date	Entered by

CORRIGENDA		
No.	Date	Entered by



## FOREWORD

The aim of the manual is to inform aviation and petroleum industries globally about the existence of internationally accepted petroleum and aviation industry fuel practices and to reinforce the need for compliance with them. In addition to informing future work for aviation fuel quality issues, the development of this manual has highlighted the importance of appropriate knowledge throughout the fuel supply chain.

Therefore, the manual acts as a “signpost” document to the relevant industry practices, covering all matters related to aviation fuel quality control, operations and training across the entire supply and distribution system, from refinery to aircraft. Future editions of this manual will consider the inclusion of more signposting information, including areas of training and organizational competence. Technical reviews will continue to be undertaken of any relevant changes in the aviation and/or petroleum industries, as well as methods for verification of organizational competence, appropriate to the industries.

This manual is not associated with any one specific ICAO Annex. The use of “shall” in several places is quoted from, or makes reference to, text that appears in industry standards or national safety regulations only and is not used in the context of ICAO Standards and Recommended Practices (SARPs). Where the word “shall” is used there is a footnote reference provided by the IATA Technical Fuel Group (TFG).

The manual was developed by ICAO from material drafted by a task force of IATA’s Technical Fuel Group, in coordination with the Airports Council International (ACI) and Airlines for America (A4A). The membership of the TFG’s task force is listed in Appendix 1, and their contribution is acknowledged.







# TABLE OF CONTENTS

	<i>Page</i>
<b>Glossary</b> .....	<b>(ix)</b>
<b>Publications</b> .....	<b>(xi)</b>
<b>Chapter 1. Introduction</b> .....	<b>1-1</b>
1.1 Purpose and background.....	1-1
1.2 Roles and responsibilities .....	1-1
1.3 Fuel contamination in the supply chain, types of contamination and where it can occur .....	1-2
<b>Chapter 2. Safety, quality and operations management</b> .....	<b>2-1</b>
2.1 Safety management .....	2-1
2.2 Quality management and the interface with safety management .....	2-1
2.3 Operations management .....	2-3
<b>Chapter 3. General requirements</b> .....	<b>3-1</b>
3.1 Operations .....	3-1
3.2 Aviation turbine engine fuel (jet fuel) .....	3-1
3.3 Additives .....	3-2
3.4 Sampling for testing of aviation fuels .....	3-2
3.5 Laboratory requirements.....	3-3
3.6 Documentation .....	3-3
3.7 Microbiological growth .....	3-4
3.8 Design standards and commissioning/maintenance procedures.....	3-4
3.9 Monitoring.....	3-5
3.10 Training and emergency procedures .....	3-6
<b>Chapter 4. Supply and distribution system</b> .....	<b>4-1</b>
4.1 General.....	4-1
4.2 Refinery — Quality requirements at manufacturing sites.....	4-1
4.3 Supply and distribution facilities — Quality requirements at pre-airfield terminals.....	4-1
4.4 Primary and secondary transport — Quality requirements .....	4-2
<b>Chapter 5. Airport storage and hydrant systems</b> .....	<b>5-1</b>
5.1 General.....	5-1
5.2 Design, construction and maintenance.....	5-1
5.3 Aviation product quality and other technical programmes .....	5-2
<b>Chapter 6. Into-plane operations</b> .....	<b>6-1</b>

	<i>Page</i>
6.1 General.....	6-1
6.2 Quality control requirements.....	6-1
6.3 Change management — Notification of change .....	6-2
6.4 Re-fuelling of aircraft — Fuel quality considerations.....	6-2
6.5 Fuelling vehicles — Technical and filtration requirements .....	6-2
<b>Appendix 1. Organizations involved in the drafting of this manual.....</b>	<b>App 1-1</b>
<b>Appendix 2. Regulatory practices in States (Reserved) .....</b>	<b>App 2-1</b>

---

# GLOSSARY

## ACRONYMS

ACI	Airports Council International
AFQRJOS	Aviation Fuel Quality Requirements for Jointly Operated Systems
API	American Petroleum Institute
ARP	Aerospace Recommended Practice
AS	Aerospace Standard
ASTM	American Society for Testing and Materials (now called ASTM International)
ATA	Air Transport Association of America Inc. (now called Airlines for America (A4A))
A4A	Airlines for America
CEN	European Committee for Standardisation
COA	Certificate of Analysis
CSA	Canadian Standards Association
EI	Energy Institute
EQA	External Quality Assurance schemes
GOST	Russian National Standard
HM	Hydrocarbon Management
IATA	International Air Transport Association
IATA TFG	IATA Technical Fuel Group
IEC	International Electrotechnical Commission
IFQP	IATA Fuel Quality Pool
ISO	International Organization for Standardization
JIG	Joint Inspection Group
PSPs	Policies, Standards and Procedures
PTC	Periodic Test Certificate
QMS	Quality Management System
RC	Release Certificate
RCQ	Refinery Certificate of Quality
RP	Recommended Practice
RTC	Recertification Test Certificate
SAE	SAE International
SARPs	Standards and Recommended Practices (ICAO)
SMS	Safety Management System
UK AFC	United Kingdom Aviation Fuels Committee
UK MOD	United Kingdom Ministry of Defence

## DEFINITIONS

**Fuel contamination.** For the purpose of this document, fuel that is cross-contaminated by other products, including other fuel grades or additives, that could put the fuel off-specification; contains unacceptable levels of particulates or water — fails the visual clear and bright check or exceeds the cleanliness limits set out in IATA *Guidance Material for Aviation Turbine Fuels Specifications*, Part III, *Cleanliness and Handling*; or contains unacceptable levels of microbiological growth — see Chapter 3, 3.7.

**Fuel quality.** A degree or level of confidence that fuel provided meets the requirements of the appropriate fuel specification, and end-user purpose, in terms of specification and cleanliness.

**Quality**

*Control.* A system of maintaining standards in manufactured products by testing a sample of the output against the specification.

*Assurance.* A systematic monitoring and evaluation of the various aspects of a project, service or facility to maximize the probability that minimum standards of quality are being attained.

*Management.* A systemic integration of planning, quality control, quality assurance and process improvement in order to achieve a desired or improved output.

---

# **PUBLICATIONS**

*(referred to in this manual)*

## **ICAO PUBLICATIONS**

### **Annexes to the Convention on International Civil Aviation**

*Annex 6 — Operation of Aircraft*

*Part I — International Commercial Air Transport — Aeroplanes*

*Part II — International General Aviation — Aeroplanes*

*Part III — International Operations — Helicopters*

*Annex 8 — Airworthiness of Aircraft*

*Annex 14 — Aerodromes*

*Volume I — Aerodrome Design and Operations*

### **Manuals**

*Manual of Procedures for Operations Inspection, Certification and Continued Surveillance (Doc 8335)*

*Manual on Certification of Aerodromes (Doc 9774)*

*Safety Management Manual (SMM) (Doc 9859)*

## **PUBLICATIONS OF OTHER STATES OR ORGANIZATIONS**

### **Airlines for America (A4A)** (formerly Air Transport Association of America Inc. (ATA))

*Airport Fuel Facility Operations and Maintenance Guidance Manual*

ATA Specification 103     *Standard for Jet Fuel Quality Control at Airports*

### **Airports Council International (ACI)**

*Airside Safety Handbook*

### **American Petroleum Institute (API)**

API RP 1543     *Documentation, Monitoring and Laboratory Testing of Aviation Fuel During Shipment from Refinery to Airport*

API RP 1595      *Design, Construction, Operation, Maintenance, and Inspection of Aviation Pre-Airfield Storage Terminals*

#### **ASTM International**

ASTM D1655      *Standard Specification for Aviation Turbine Fuels*

ASTM D4057      *Standard Practice for Manual Sampling of Petroleum and Petroleum Products*

ASTM D4306      *Standard Practice for Aviation Fuel Sample Containers for Tests Affected by Trace Contamination*

ASTM D6299      *Standard Practice for Applying Statistical Quality Assurance and Control Charting Techniques to Evaluate Analytical Measurement System Performance*

ASTM D6469      *Standard Guide for Microbial Contamination in Fuels and Fuel Systems*

ASTM D6708      *Standard Practice for Statistical Assessment and Improvement of Expected Agreement between Two Test Methods that Purport to Measure the Same Property of a Material*

#### **Energy Institute (EI)**

*Guidance on development, implementation and improvement of quality systems in petroleum laboratories*

*Guidelines for the investigation of the microbial content of petroleum fuels and for the implementation of avoidance and remedial strategies*

*Multi-product pipelines: minimum criteria to determine additive acceptability*

EI HM 50              *Guidelines for the cleaning of tanks and lines for marine tank vessels carrying petroleum and refined products*

EI IP 475              *Petroleum liquids — Manual sampling (ISO 3170:2004)*

EI/JIG Standard 1530      *Quality assurance requirements for the manufacture, storage and distribution of aviation fuels to airports<sup>1</sup>*

EI 1540              *Design, construction, operation and maintenance of aviation fuelling facilities*

EI Standard 1541      *Performance requirements for protective coating systems used in aviation fuel storage tanks and piping*

EI 1550              *Handbook on equipment used for the maintenance and delivery of clean aviation fuel*

EI 1560              *Recommended practice for the operation, inspection, maintenance and commissioning of aviation fuel hydrant systems and hydrant system extensions<sup>2</sup>*

1. To be published in the second quarter of 2013.

2. To be published in the first quarter of 2013.

---

EI 1581	<i>Specification and qualification procedures for aviation jet fuel filter/separators</i>
EI 1583	<i>Laboratory tests and minimum performance levels for aviation fuel filter monitors</i>
EI 1584	<i>Four-inch hydrant system components and arrangements</i>
EI 1585	<i>Guidance in the cleaning of aviation fuel hydrant systems at airports</i>
EI RP 1594	<i>Initial pressure strength testing of airport fuel hydrant systems with water</i>

**European Committee for Standardisation (CEN)**

EN 12312-5	<i>Aircraft ground support equipment — Specific requirements — Part 5: Aircraft fuelling equipment</i>
------------	--

**International Air Transport Association (IATA)**

*Introduction to Safety Management Systems (SMS) (Ref. No: 8402-01)*

*Guidance Material for Aviation Turbine Fuels Specifications*

Part I — *Guidance Material on Product Specifications*

Part II — *General Guidance on Additives*

Part III — *Cleanliness and Handling*

*Guidance Material on Microbiological Contamination in Aircraft Fuel Tanks*

*Guidance Material on Standard Into-Plane Fuelling Procedures*

**International Air Transport Association (IATA) Fuel Quality Pool (IFQP)**

*Control of Fuel Quality & Fuelling Safety Standards*

*IFQP Training Manual*

**International Organization for Standardization**

ISO 3170 *Petroleum liquids — Manual sampling*

**International Organization for Standardization/International Electrotechnical Commission (ISO/IEC)**

EN ISO/IEC 17025 *General requirements for the competence of testing and calibration laboratories*

**Joint Inspection Group (JIG)**

JIG 1 *Aviation Fuel Quality Control & Operating Standards For Into-Plane Fuelling Services*

JIG 2 *Aviation Fuel Quality Control & Operating Standards For Airport Depots & Hydrants*

- JIG 3            *Aviation Fuel Quality Control & Operating Standards For Supply & Distribution Facilities*
- JIG 4            *Guidelines for Aviation Fuel Quality Control & Operating Procedures For Smaller Airports*
- JIG Bulletin 32    *Health, Safety, Security & Environmental Management System (HSSEMS)*
- JIG Bulletin 35    *Soak Testing*
- JIG Bulletin 39    *Fuel Hydrant Commissioning*

**National Technology Supervisory Bureau of the People's Republic of China**

- GB6537            *Jet Fuel No. 3*

**SAE International**

- SAE ARP 5789    *Aviation Fuel Facilities*
- SAE ARP 5818    *Design and Operation of Aircraft Refueling Tanker Vehicles*
- SAE ARP 5918    *Standard Test Criteria for Aircraft Refuelers*
- SAE AS 5877A    *Detailed Specification for Aircraft Pressure Refueling Nozzle*
- SAE AS 6401      *Storage, Handling and Distribution of Jet Fuels at Airports<sup>3</sup>*

**Russian Federation**

- GOST 10227      *Jetfuels. Specifications*

**United Kingdom Ministry of Defence (MOD)**

- Jet A-1 DEF STAN 91-91    *Turbine Fuel, Kerosine Type*

---

3. To be published in the second quarter of 2013.



# Chapter 1

## INTRODUCTION

### 1.1 PURPOSE AND BACKGROUND

1.1.1 The purpose of this manual is to inform the aviation and petroleum industries globally about the existence of internationally accepted petroleum and aviation industry fuel practices and to reinforce the need for compliance with those requirements and operating procedures. The need for this emphasis has been highlighted by occurrences involving actual contamination of, or the potential to contaminate, aviation jet fuel. The requirements are set out in numerous industry and company proprietary policies, standards and procedures (PSPs) covering the entire supply and distribution system. These PSPs have been developed to safeguard aviation fuel quality and to ensure safe operations from point of manufacture to delivery into aircraft fuel tanks.

1.1.2 Collectively, the PSPs referenced in this manual<sup>1</sup> describe the quality organization, facility design requirements, quality and safety management arrangements and operating practices to manage product movement through the supply chain. A primary purpose is to mitigate the threats to aviation fuel quality and to ensure the safe delivery of fuel into aircraft fuel tanks (into-plane). The various controls and procedures reflect a philosophy of product testing, traceability and segregation to prevent contamination and to ensure that the fuel is on-specification at point of delivery to aircraft.

1.1.3 Using extracts from and references to these industry PSPs, this manual describes the fuel quality requirements through the stages of fuel provision from refinery to aircraft, as illustrated in Figure 1-1. References to other ICAO manuals are made in the appropriate areas.

1.1.4 The intended audience for this manual includes:

- a) the various companies involved in the manufacture, supply, distribution and delivery of aviation fuel throughout the supply chain — from refinery to aircraft;
- b) the receivers of these services;
- c) focal points for State safety activity, including State safety regulators of the aviation and petroleum industries;<sup>2</sup> and
- d) industry auditors, including those from aviation service providers and fuel end-users.

### 1.2 ROLES AND RESPONSIBILITIES

1.2.1 Any business entity involved in the aviation fuel supply chain has an obligation to implement and comply with industry and/or company proprietary PSPs, as described in this manual, that cover the activities in which they are involved. For example:

---

1. Readers should refer to the latest revision of any referenced document.  
2. Appendix 2 is reserved for the consideration of examples of regulatory practices in a future edition.

- a) Supply and distribution — for upstream of the airport see Chapter 4, and from airport to aircraft, see relevant parts of Chapters 5 and 6.
- b) Aircraft operators — see Chapter 5, 5.1.2 and 5.1.3, and Chapter 6, 6.1.3. ICAO SARPs for the certification of air operators can be found in Annex 6, Parts I, II and III. Related guidance material can be found in ICAO Doc 8335.
- c) Airport (aerodrome) operators — airport (aerodrome) operators have a range of interfaces with other organizations operating on their airports (aerodromes), and the following documents refer:
  - i) *ACI Airside Safety handbook* — see Chapter 3, section 3.10, *Interface with stakeholders*, and Chapter 4, *SMS*.
  - ii) ICAO Doc 9774 provides guidance on the role of aerodrome operators in relation to the users of those aerodromes — see Section 3D.4, *Aerodrome operator's safety management system*, and 3D.5, *Aerodrome operator's internal safety audits and safety reporting*.

1.2.2 See Chapter 2, 2.1, for reference to ICAO SARPs on safety management systems (SMS), as well as industry and ICAO guidance on SMS.

### 1.3 FUEL CONTAMINATION IN THE SUPPLY CHAIN, TYPES OF CONTAMINATION AND WHERE IT CAN OCCUR

1.3.1 Figure 1-1 is from the IATA *IFQP Training Manual*.<sup>3</sup> It illustrates a schematic for the supply and distribution chain from refinery to aircraft. Actual routes, outlined in Chapter 4, and required tankage and filtration will vary depending on the needs of any particular supply route. From the airport fuel depot the fuel is delivered to aircraft via hydrant and vehicle systems discussed in Chapters 5 and 6. The risk to the integrity of the fuel in relation to its inherent properties and from contaminants can occur at any point in the supply chain from the point of manufacture to the final delivery to aircraft, and thus create the potential to adversely affect fuel systems, including fuel tanks, aircraft fuel systems and engines.

1.3.2 The primary types of contamination are water, particulate and microbiological material. In addition, contamination can occur from other fuel grades and chemicals that may be in multi-product transport systems. The fuel may also be rendered off-specification by either under-dosing/overdosing of approved additives, using an incorrect additive or from product testing issues not limited to, but including, poor sampling, incorrect test procedures and uncalibrated laboratory equipment. These issues can occur in the various elements of the supply chain as follows:

- a) *Refinery*. Incorrect and/or inadvertent use of additives, insufficient settling/tank cleaning to allow removal of dirt and water, incorrect sampling, incorrect test procedures and a lack of laboratory equipment calibration.
- b) *Pipeline*. Inadequate interface monitoring and cutting procedures, interface migration due to poor pipeline controls, failure to flush manifolds, dead legs and booster pumps. Also, inappropriate pipeline sequencing, lack of effective pipeline maintenance, infrequent or ineffective low point drains, lack of document checks/traceability.
- c) *Marine*. Inappropriate vessel selection, incorrect loading or unloading sequence, ineffective cargo segregation, incorrect and/or inadvertent use of additives on-board, non-dedicated marine loading arms or hoses and inadequate draining/flushing/change-of-grade procedures, lack of document checks/traceability.

---

3. Used with the permission of IATA.

- d) *Filtration.* Incorrectly specified filters, inadequate maintenance and daily operation checks, unsuitable or damaged filter vessel lining, incorrectly installed filters and incorrectly installed ancillary equipment.
- e) *Storage tanks.* Poor design making water and dirt removal difficult or impossible, incorrect lining materials, failure to conduct adequate draining for water and dirt removal, lack of effective segregation, ineffective change-of-use procedures, infrequent tank inspection and cleaning.
- f) *Road and rail.* Breakdown and/or mishandling of critical equipment, cross-contamination, incorrect change-of-grade procedures, no settling and draining prior to discharge, lack of document checks/traceability.
- g) *Airport vehicles.* Breakdown and/or mishandling of critical equipment, inadequate checks during loading and/or fuelling.

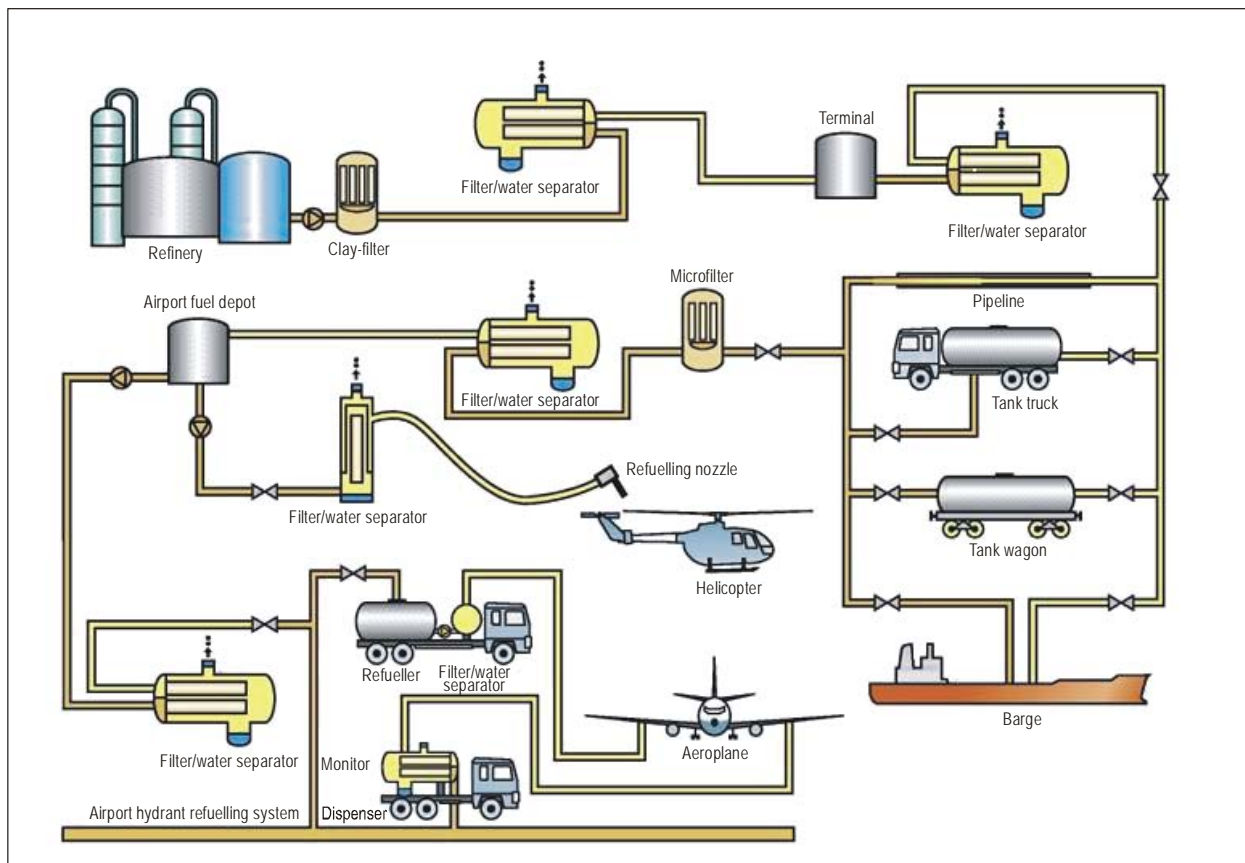


Figure 1-1. Schematic for the supply and distribution chain from refinery to aircraft



## Chapter 2

# SAFETY, QUALITY AND OPERATIONS MANAGEMENT

### 2.1 SAFETY MANAGEMENT

2.1.1 It is a petroleum industry expectation, as well as that of other interested stakeholders and end-users, that every responsible organization involved in aviation fuel manufacture, supply, storage, transport, testing and aircraft fuelling has a robust system for managing safety. ICAO defines a Safety Management System (SMS) as a systematic approach to managing safety, including the necessary organizational structures, accountabilities, policies and procedures. ICAO has introduced harmonized requirements into its relevant Annexes to the ICAO Chicago Convention, including Annex 6, Annex 8 and Annex 14, Volume 1. ICAO Doc 9859 is referenced in all of these Annexes and gives details of an SMS framework and its four safety components: Policy and objectives, Risk management, Assurance, and Promotion.

2.1.2 Examples of industry guidance on SMS are:

- a) IATA Ref. No: 8402-01;
- b) *ACI Airside Safety Handbook*, Chapter 4 — *Safety Management Systems*; and
- c) JIG Bulletin 32.

2.1.3 Good, accepted SMS practice includes the following:

- a) identification and acknowledgement of hazards and assessed safety risks, including those emerging from change and new technology or products;
- b) proactive and reactive measures to control risks to a level consistent with the acceptable levels of risk determined by organizations, as described in their system manuals;
- c) a change management process as part of safety assurance;
- d) a process for internal safety performance monitoring — safety audits; and
- e) processes for assessing the adequacy of SMSs, including those of relevant third parties where appropriate, and arrangements to improve performance where necessary.

### 2.2 QUALITY MANAGEMENT AND THE INTERFACE WITH SAFETY MANAGEMENT

2.2.1 Quality control and assurance that reflects good, accepted international practice is part of robust quality management (QM), and quality management tools offer support for the management of risks to aircraft safety.<sup>1</sup>

---

1. For more on the relationship between SMS and QMS refer to ICAO Doc 9859.

2.2.2 It is therefore of fundamental importance that every responsible organization involved in aviation fuel manufacture, supply, storage, transport, testing and aircraft fuelling has such a system in place for managing quality, in order to maintain the aviation fuel specification and quality while in its custody and/or its control. These systems should ensure that:

- a) aviation fuel is manufactured to the latest issue of the relevant specification;
- b) facilities and equipment are maintained in good condition for the safe delivery of on-specification, clean and uncontaminated aviation fuel from refinery to aircraft;
- c) an auditable and documented record exists, confirming correct handling and testing of aviation fuel throughout the supply chain from refinery to aircraft;
- d) traceability is maintained to ensure that products are on-specification and fit-for-purpose on delivery to aircraft — the requirement for traceability applies to products supplied in accordance with MOD Defence Standard 91-91;
- e) where change or variation in standard procedures is required, there is an implemented change management process with clear levels of authority to ensure the integrity of the product supply or service provision system during the change or variance. This process should be complementary to a similar change management process of safety management, using the risk management component of an SMS framework or alternative industry standard;<sup>2</sup> and
- f) there is notification of reinstatement of standard procedures after change or variance.

2.2.3 The elements of effective QM, described and documented appropriately include, but are not limited to:<sup>3</sup>

- a) goals and objectives, with clearly expressed policies, standards and procedures;
- b) organizational structure with management having appropriate and stated responsibilities;
- c) qualified, competent and properly trained staff, with proficiency testing where necessary;
- d) provision, maintenance and, where necessary, the calibration of adequate and appropriate facilities; and
- e) appropriate processes and procedures to match the scope of a company's activities, including:
  - i) process controls that include the recording and handling of evidence;
  - ii) management of change and variance procedures;
  - iii) monitoring, auditing and validation of activity;
  - iv) reporting, reviewing and follow-up with corrective action plans;
  - v) analytical procedures, as necessary;
  - vi) the interface with safety requirements and assurance; and
  - vii) accreditation, as necessary.

---

2. For more on risk management refer to ICAO Doc 9859, and industry SMS guidance documents.

3. This list is expanded upon in the other chapters in the context of quality management. There is some overlap with the list of typical operations manual content in 2.3.

## 2.3 OPERATIONS MANAGEMENT

2.3.1 To adhere to the intent of this manual, companies involved in the manufacture, distribution, testing, monitoring and supply of aviation fuel should develop and implement an “operations manual” describing the manner in which the company operates.

2.3.2 The scope of such a manual should be appropriate to the part or parts of the provision chain in which the company operates, taking account of interface issues, as well as reflecting the application of the petroleum industry standards and practices referenced in this manual. In order to meet this expectation each company operations manual should include the appropriate level of detail. Content should include:

- a) the organization’s structure;
- b) names, roles and accountabilities/responsibilities of key personnel, appropriately qualified, knowledgeable and experienced. This will include:
  - i) an “accountable” executive who has overall accountability and authority for the organization’s policies, objectives, procedures, implementation and products;
  - ii) accountable managers with the authority to establish and modify processes; and
  - iii) a process to ensure the continuity of tasks and safety or quality programmes during the absence of a post-holder who is specified as having the primary responsibility for that task or programme;
- c) health, safety, security, environmental and quality policies and objectives, including those covering management commitment and organizational competence;
- d) health, safety, security, environmental and quality management systems, including assurance elements;
- e) product quality performance criteria, targets and indicators;
- f) self-audit conducted by competent individuals independent of the management of daily operations, including arrangements for assessing process and process controls for effectiveness, such as:
  - i) identifying non-compliance with company operating procedures;
  - ii) correcting reported discrepancies; and
  - iii) determining organizational competence;
- g) standard operating and control procedures covering arrangements for working at the interfaces with other parts of the system, including end-user safety requirements, as appropriate;
- h) emergency planning, including asset integrity and business continuity planning, taking account of customers’ business continuity plans and needs;
- i) training and safety promotions programme;
- j) document management; and
- k) independent audits.

2.3.3 In addition to an operations manual, companies should provide sufficient specialist operational facilities and resources — financial, technical, logistic and human. In case of doubt about, or to assess the adequacy of, an operations manual or resources, a gap analysis of content and provision against requirements and scope of operations should be undertaken.

2.3.4 Operations manuals may also include the content of company quality and safety management systems, much of which will be covered by the above, or they may be separate but associated manuals.

---



## Chapter 3

# GENERAL REQUIREMENTS

### 3.1 OPERATIONS

It is essential that comprehensive industry and/or company proprietary PSPs are implemented across the entire supply chain in order to cover the critical operational activities necessary to safeguard aviation fuel quality and ensure safe delivery into aircraft. The following operational activities are addressed in one or more of the referenced documents in this manual:

- a) receipts;
- b) transfers;
- c) storage;
- d) dispensing;
- e) product inspection and routine check programme:
  - i) quality control and maintenance record-keeping requirements and record retention times;
  - ii) training programme;
  - iii) document and data control system; and
  - iv) emergency response;
- f) reporting of observed deficiencies or hazards that could generate risks to the safety of personnel, facilities or equipment, including aircraft;
- g) managing and handling contaminated fuel;
- h) procedures for handling defuelled fuel products; and
- i) customer notification.

### 3.2 AVIATION TURBINE ENGINE FUEL (JET FUEL)

There are numerous national and international specifications for civil jet fuel controlled by national governments or by international organizations such as ASTM International and the United Kingdom Aviation Fuels Committee. Approved specifications are listed in the aircraft engine and airframe manufacturers' operation manuals and recognized by the various aviation regulatory authorities. Common civil grades and specifications used around the world include, but are not limited to:

- a) Jet A or Jet A-1 to ASTM D1655;
- b) Jet A-1 to Defence Standard 91-91;
- c) TS-1 to GOST 10227; and
- d) Jet fuel No. 3 to GB6537.

For more information refer to the IATA *Guidance Material for Aviation Turbine Fuels Specifications*, Part I — *Guidance Material on Product Specifications*. Only approved materials as defined by the primary specification shall<sup>1</sup> be used in the manufacture of aviation fuel.

### 3.3 ADDITIVES

3.3.1 Approved additives are listed in each of the jet fuel specifications as well as the airframe and engine manufacturer specifications. Guidance on the use of additives in aviation fuels can be found in the IATA *Guidance Material for Aviation Turbine Fuels Specifications*, Part II — *General Guidance on Additives*.

3.3.2 The use of additives in aviation fuels is carefully controlled and limited because of the potential for undesirable side effects. For example, under certain circumstances additives can affect the ability to maintain fuel cleanliness during shipment and handling, or they may adversely impact the aircraft fuel system and turbine engine operation or maintenance.

3.3.3 Only approved additives in the amount and of the composition approved by the airframe and engine manufacturers, and cited by the relevant specification authority, may be used. Additives not listed in the specifications for aviation fuels are not permitted.

### 3.4 SAMPLING FOR TESTING OF AVIATION FUELS

At appropriate stages during the handling and storage of aviation fuels, samples will be required for laboratory or visual examination in order to establish that fuel products meet the requirements of the relevant specifications, or to detect fuel contamination or deterioration. Sampling standards and procedures appropriate to the test should be applied. In addition the following apply:

- a) Sampling equipment fabricated from copper or its alloys should not be used for sampling jet fuels (refer to ASTM D4306 for suitable materials).
- b) Sampling should be undertaken by appropriately trained personnel using correct procedures and apparatus. This is to ensure that the sample obtained is truly representative of the material from which it has been drawn.
- c) Sampling should be in accordance with the latest requirements of the following procedures or other approved and equivalent standards that may be defined by the requirements of the testing to be performed on the sample:
  - i) JIG 1, 2 and 3, Chapter 2, “*Sampling and Testing*”;

---

1. Refer to ASTM D1655 and Defence Standard 91-91, for example.

- ii) SAE AS 6401;
- iii) ISO 3170 (EI IP 475); and
- iv) ASTM D4057.

### 3.5 LABORATORY REQUIREMENTS

3.5.1 Appropriate quality processes for laboratory activities are a vital component of good laboratory practice. Laboratories engaged in the testing and certification of aviation fuels should adopt independent quality control and assurance standards, for example:

- a) ASTM D6299;
- b) ASTM D6708;
- c) accreditation to EN ISO/IEC 17025;
- d) participation in external quality assurance schemes (EQA); and
- e) comparative testing through recognized cross-check schemes such as run by the EI and ASTM.

3.5.2 The laboratory should establish and maintain a documented QMS that is appropriate to the testing activities. The quality manual should address, at a minimum, those appropriate elements in Chapter 2, 2.2.2. For further information see EI *Guidance on development, implementation and improvement of quality systems in petroleum laboratories*.

### 3.6 DOCUMENTATION

Documentation is an integral part of robust quality assurance. Documentation is used throughout the supply and distribution system for a variety of purposes, e.g. to certify fuel quality, confirm fuel quality after distribution, record quality control and maintenance checks and demonstrate fuel traceability. Certain documentation is mandatory, such as the Refinery Certificate of Quality or Certificate of Analysis, as evidence that the fuel conforms to the relevant specification. Common quality documentation used with aviation fuel includes, but is not limited to:

- a) Refinery Certificate of Quality (RCQ);
- b) Certificate of Analysis (COA);
- c) Recertification Test Certificate (RTC);
- d) Periodic Test Certificate (PTC);
- e) Release Certificate (RC);
- f) Batch Make-up and Clearance Record;
- g) Filter Inspection Report; and
- h) Tank Inspection Report.

Detailed definitions for these and other types of quality documentation can be found in JIG 1, 2 and 3, SAE AS 6401, API RP 1543 and 1595 and EI/JIG Standard 1530.

### 3.7 MICROBIOLOGICAL GROWTH

3.7.1 Aviation fuels, fuel storage systems, fuel handling equipment and aircraft fuel tanks can become contaminated by microbiological species (microbes). Microbes can spoil fuels, cause severe damage to equipment and create blockages in fuel filters and fuel lines. In cases of confirmed microbial contamination, significant downtime is often required for remedial treatment, which can lead to interruptions in supply and disruption to both fuelling and aircraft operations. Microbial contamination in fuel and fuel systems is a very real, serious and costly issue which has potential for a direct impact on the safety of aviation operations.

3.7.2 Water is essential for microbiological growth; therefore it is critical that fuel systems are kept as dry as possible by frequent draining of any accumulated water. The fundamental method for assessing the presence of microbiological growth in storage tanks and filters is the daily clear and bright test on a sump sample. The presence of discoloured water, a lacy interface between the fuel and water layers or organic debris in the fuel or water layer are all indications of likely microbiological activity requiring immediate investigation and appropriate expert advice. The following industry documents provide detailed information on testing, control and remedial strategies:

- a) *IATA Guidance Material on Microbiological Contamination in Aircraft Fuel Tanks;*
- b) ASTM D6469;
- c) *EI Guidelines for the investigation of the microbial content of petroleum fuels and for the implementation of avoidance and remedial strategies;*
- d) SAE AS 6401;
- e) JIG 1, 2 and 3; and
- f) API RP 1595.

### 3.8 DESIGN STANDARDS AND COMMISSIONING/MAINTENANCE PROCEDURES

3.8.1 Design is a vital factor in providing one of the first lines of defence against poor fuel quality and the potential for aircraft safety to be compromised. Well-considered design, implemented into properly commissioned facilities and equipment can provide defences in areas that may not be identified through quality or safety audits. There are various design standards for different stages in the overall supply chain.

3.8.2 EI 1550 provides a comprehensive overview of the fuel handling systems used in the aviation industry to maintain batch integrity and product cleanliness throughout the distribution system and into the aircraft. EI 1550 provides detailed information on the following:

- a) maintaining aviation fuel cleanliness from batch/point of certification to into-plane delivery;
- b) the design, installation and operation of filtration/water removal equipment used in aviation fuel handling systems in order to ensure fuel cleanliness;

- c) operational characteristics of different system components as applied in the aviation fuel handling system;
- d) certain aspects of the design of the other fuel cleanliness monitoring/control equipment that may be used in aviation fuel handling systems;
- e) key issues to be considered in the selection and use of combinations of various technologies/quality assurance procedures to achieve the requisite fuel cleanliness; and
- f) other standards or publications that should be consulted for additional in-depth information.

3.8.3 Information on commissioning and maintenance of facilities for handling aviation fuel at airport facilities can be found in:

- a) EI 1540;
- b) EI 1585; and
- c) SAE AS 6401.

3.8.4 JIG Bulletin No. 35 provides guidance on soak testing, which should be carried out after construction work or repairs on fuel systems and vehicles in order to ensure that there are no leaks and potential contaminants present in the form of solvents from coatings/linings, welding flux, valve grease or other general debris. Soak testing should be carried out even if the systems are constructed of aluminium or stainless steel.

3.8.5 A defined system of regular maintenance should be in place to ensure the integrity of the supply system. A maintenance programme should be implemented for parts and equipment, encompassing manufacturers' service recommendations and practices. Refer to JIG 1, 2 and 3, EI/JIG Standard 1530, API RP 1595 and SAE AS 6401 for further information.

### 3.9 MONITORING

3.9.1 The internal monitoring process assesses compliance with the requirements of the PSPs implemented throughout the entire supply and distribution system. The system includes refineries, pre-airport terminals, airport depots, into-plane fuelling operations, transportation companies (e.g. pipeline operators, waterway vessel operators and road/rail transport) and laboratories. Regularly scheduled PSP inspections and audits should be carried out by competent individuals using structured checklists to verify compliance with system controls and to confirm that the controls are working as intended.

3.9.2 External monitoring assesses compliance with the industry standards and customer requirements and includes audits and inspections. These audits and inspections should be performed by competent personnel from related industry organizations, airlines and airline pools, and regulatory agencies where there are appropriate State regulations. Inspectors must have the necessary access to the relevant facilities in order to perform these inspections or audits.

3.9.3 Industry best practice for monitoring compliance with site PSPs at supply and distribution facilities, airport depots and aircraft re-fuelling (into-plane) operations is described in:

- a) IFQP — *Control of Fuel Quality & Fuelling Safety Standards*, incorporating SAE AS 6401;
- b) JIG Standards — JIG 1, JIG 2 and JIG 3, respectively;

- c) JIG Standards — JIG 4 for smaller airports;
- d) ATA Specification 103;
- e) API RP 1595; and
- f) API RP 1543.

### 3.10 TRAINING AND EMERGENCY PROCEDURES

3.10.1 Any organization that manufactures, supplies or handles aviation fuel should have a documented training programme for its personnel. The programme should cover product quality, safe operation of equipment, emergency procedures and occupational health, as well as management systems for operational safety, environment and security. In particular, the programme should include in its scope a systematic way to identify hazards and effectively control risks to fuel quality, personnel, and facility and equipment or aircraft safety. For more information refer to:

- a) JIG 1, JIG 2, JIG 3 and SAE AS 6401 for detailed health, safety, security, environment, training and emergency procedures;
- b) ICAO Doc 9859;
- c) IATA Ref. No: 8402-01;
- d) JIG Bulletin 32 for risk management and safety promotion;
- e) *ACI Airside Safety Handbook*; and
- f) *ATA Airport Fuel Facility Operations and Maintenance Guidance Manual*.

3.10.2 There should be a process to:

- a) monitor implementation of the programme;
  - b) assess the effectiveness of the trainers and the training given, including retention of knowledge and adherence to procedures over time; and
  - c) identify requirements for recurrent training and updating of knowledge.
-

## Chapter 4

# SUPPLY AND DISTRIBUTION SYSTEM

### 4.1 GENERAL

PSPs have been developed and implemented across the supply chain to provide the maximum assurance possible that only on-specification, clean and uncontaminated fuel is delivered into airport fuel tanks. These PSPs are described in industry and company proprietary documents covering the manufacture, transport, storage, handling and testing of aviation fuels at refineries, pre-airfield terminals and airport depots.

### 4.2 REFINERY — QUALITY REQUIREMENTS AT MANUFACTURING SITES

4.2.1 The basic quality control requirements for handling aviation fuels at refineries are typically set out in company proprietary documents due to the complexity and unique nature of individual sites. Given this situation, no single industry standard exists that covers the aviation fuel quality requirements at refineries. It is therefore imperative that refinery quality-control PSPs meet or exceed the requirements described in recognized industry standards such as:

- a) EI/JIG Standard 1530;
- b) JIG 3;
- c) API RP 1543; and
- d) API RP 1595.

4.2.2 EI/JIG Standard 1530 provides greater detail on the quality control requirements that should be implemented at refineries. These requirements include, but are not limited to, process unit monitoring, additive use, storage and sampling and testing requirements for initial certification.

4.2.3 The main purpose of a refinery quality control manual is to ensure that certified aviation fuel meets all requirements of the relevant specification and not just the main table test results, and that the integrity of the batch is maintained up to the point of shipment off-site. It is critical for refineries that supply directly to airports to implement quality control procedures that meet or exceed the requirements set out in JIG 3 or API RP 1595. The manual should also cover the quality requirements for sites that act as intermediate supply and distribution facilities by importing finished product for subsequent release into the distribution system.

### 4.3 SUPPLY AND DISTRIBUTION FACILITIES — QUALITY REQUIREMENTS AT PRE-AIRFIELD TERMINALS

4.3.1 The basic quality control requirements for supply and distribution facilities upstream of the airport are described in the following industry standards:

- a) JIG 3;
- b) API RP 1543;
- c) API RP 1595; and
- d) EI/JIG Standard 1530.

4.3.2 Supply and distribution facilities which are owned and/or operated independently,<sup>1</sup> or where the joint venture members agree, may implement quality control requirements set out in company proprietary documents that should meet, as a minimum, the requirements set out in the appropriate industry standards.

#### 4.4 PRIMARY AND SECONDARY TRANSPORT — QUALITY REQUIREMENTS

4.4.1 Primary transport refers to the shipment of bulk aviation fuel from refineries to pre-airfield supply terminals. Shipment is typically via non-dedicated transport systems such as multi-product pipelines or vessels (marine and inland water). Secondary transport refers to the shipment of aviation fuel from pre-airfield supply terminals direct to airports. Shipment is typically via dedicated and segregated transport systems such as grade-dedicated pipelines, road tankers or rail tank cars. In some cases aviation fuel is shipped directly from the refinery to an airport via dedicated or non-dedicated transport systems.

4.4.2 The procedures used in the operation of multi-product pipelines are set out in operating manuals of the companies or organizations responsible. These are based on industry custom and practice (especially with regard to sequencing and interface cutting) and are optimized to the individual pipeline configurations. Minimum requirements for the operation of pipelines are set out in the following industry standards:

- a) JIG 3;
- b) API RP 1543;
- c) API RP 1595;
- d) EI/JIG Standard 1530; and
- e) EI *Multi-product pipelines: minimum criteria to determine additive acceptability*.

The latter EI guidance document addresses concern over the impact of surface active additives used in other fuel types that may trail back into subsequent aviation fuel batches during transport in multi-product pipeline systems. The guidance requires initial laboratory testing, usually followed by a pipeline trial where the trailing kerosene batch is tested for conformance to the relevant aviation fuel specification.

4.4.3 There is no single industry standard controlling all aspects of the design and operation of multi-product vessels for the transport of aviation fuels. Typically, such vessels are chartered by traders or suppliers, and it is the contractual responsibility of the ship's master to declare the vessel ready to load aviation fuel. Product quality is usually controlled by contractual agreement with the appointment of independent inspectors to verify that the product meets specification before and after loading and before and after discharge. Requirements are embedded in proprietary documents or procedures used by independent inspectors. Minimum requirements for the operation of vessels are set out in the following industry standards:

---

1. Independent in this context means that it is not a joint venture and thus not controlled by joint venture documents and QA standards.



- a) JIG 3;
- b) API RP 1543;
- c) API RP 1595;
- d) EI/JIG Standard 1530; and
- e) EI HM 50.

EI HM 50 is the key industry document that sets out the cleaning requirements for vessel tanks and associated pipe work to prevent contamination and deterioration of aviation fuel cargoes. EI HM 50 also includes important information on the risk of transporting jet fuel in vessel tanks fitted with copper heating coils or zinc linings and potential quality problems resulting from poorly operating inert-gas-generating systems.

4.4.4 Mobile secondary transport systems, i.e. road transport and rail tank cars, used to deliver aviation fuel to airports are typically operated in dedicated service mode in order to prevent cross-contamination with other fuel grades. If secondary transport systems are used to carry other fuel grades, it is essential that effective change-of-grade procedures are followed before returning to aviation fuel service. Change-of-grade procedures for road transport and rail tank cars are set out in the following industry standards:

- a) JIG 3;
  - b) API RP 1595; and
  - c) EI/JIG Standard 1530.
-



## Chapter 5

# AIRPORT STORAGE AND HYDRANT SYSTEMS

### 5.1 GENERAL

5.1.1 Airport fuel storage and hydrant system operators should implement quality control requirements set out in their PSPs that meet the minimum requirements of the industry standards referenced and described in this manual.

5.1.2 The ultimate responsibility for the acceptance of the product or service provided by the airport fuel storage and hydrant system operators lies with the aircraft operator. However a primary accountability of the contracted supplier of the fuel is to demonstrate that, at the time of transfer, the fuel delivered was clean, uncontaminated and on-specification. A written contractual agreement should exist between the aircraft operator and providers/deliverers of the fuel. The agreement should define the individual responsibilities, safety-related services and quality to be provided. The airport fuel storage and hydrant system operator's safety-related activities relevant to the written agreement should be included in the aircraft operator's quality and safety assurance programmes.

5.1.3 The aircraft operator shall<sup>1</sup> ensure that the airport fuel storage and hydrant system operators have the appropriate authorization/approval when required, as well as the resources and competence to undertake the task.

### 5.2 DESIGN, CONSTRUCTION AND MAINTENANCE

5.2.1 The features relating to design of equipment are primarily intended for new facilities and equipment. It is not intended that the design and construction criteria described below would be applied retroactively where it is not practical to do so. The design requirements listed below should be applied to any future modifications or major repairs/upgrades for existing facilities and equipment, and maintenance requirements met appropriately. These requirements for airport fuel storage and hydrant systems are described in:

- a) EI 1540;
- b) EI 1550 provides a comprehensive overview of the fuel handling systems used in the aviation industry to maintain batch integrity and product cleanliness throughout the distribution system and into the aircraft;
- c) EI 1560; and
- d) SAE ARP 5789.

5.2.2 For the construction, commissioning and maintenance of an airport hydrant system the following practices should be followed:

- a) EI 1540 or SAE ARP 5789;

---

1. Refer to, for example, EU-OPS 1, EASA AMC M.A.301-1, FAR 121.105, and FAA Order 8900.

- b) EI Standard 1541;
- c) EI 1585;
- d) EI RP 1594;
- e) EI 1584; and
- f) JIG Bulletin 39.

### **5.3 AVIATION PRODUCT QUALITY AND OTHER TECHNICAL PROGRAMMES**

5.3.1 In addition to the general requirements of Chapter 2, 2.2, this section describes the minimum requirements for the quality of aviation products, as well as for health, safety, security and environment. The operators of airport storage and hydrant systems should have established quality and safety management programmes to ensure safe receipt, storage and distribution of fuel within the fuel storage and hydrant operation, in accordance with one of the following internationally accepted standards or practices:

- a) JIG 2;
- b) IFQP *Control of Fuel Quality & Fuelling Safety Standards*, incorporating SAE AS 6401; and
- c) ATA Specification 103.

5.3.2 The quality programme should be detailed in a manual, the purpose of which is to provide operational guidance to management and staff. The manual should be kept current and reviewed on a systematic basis. It should be made readily available to all relevant employees, including those on-site, and to customers' inspectors and auditors. The scope should include appropriate elements listed in Chapter 2, 2.3, including provisions to ensure that there is a system in place to identify and correct instances of non-compliance.

---

## Chapter 6

# INTO-PLANE OPERATIONS<sup>1</sup>

### 6.1 GENERAL

6.1.1 Contaminated fuel has the potential to create unacceptable safety risks to aircraft. In line with industry expectations and practices as signposted in the previous chapters, there should be robust defences in place throughout the supply chain in order to protect aircraft from the potentially damaging effects of contaminated fuel. Into-plane operations present the last opportunity to ensure that only uncontaminated, on-specification fuel is pumped into aircraft tanks. Refer to industry standards, i.e. SAE AS 6401, JIG 1 and ATA Specification 103 for more information.

6.1.2 Training — Step-by-step procedures for all critical tasks (e.g. aircraft fuelling; hot refuelling of helicopters; refuelling in a hangar environment; defuelling; fuel quality control) shall<sup>2</sup> be clearly documented (i.e. hardcopy, electronic) in order to facilitate the induction and recurrent training of employees.

6.1.3 Responsibility — The ultimate responsibility for the acceptance of the product or service provided by the sub-contractor<sup>3</sup> always remains with the airline.

### 6.2 QUALITY CONTROL REQUIREMENTS

6.2.1 In addition to the general requirements of Chapter 2, 2.2, this section describes the minimum requirements for fuel suppliers and into-plane agents to ensure fuel product quality and safe operations. This management of fuel quality should include basic quality control requirements for provision of fuel into aircraft, in accordance with one of the internationally accepted standards or good practices below:

- a) IFQP *Control of Fuel Quality & Fuelling Safety Standards*, incorporating SAE AS 6401;
- b) JIG 1;
- c) JIG 2; and
- d) ATA Specification 103.

6.2.2 The operators of airport fuel depots, and into-plane agents should implement quality control procedures and scheduled maintenance programme(s) set out in company proprietary documents which meet the minimum requirements of the industry standards in 6.2.1.

6.2.3 By virtue of contractual agreements, the aircraft operator or its representative has the authority and the access to do technical surveys/inspections/audits of:

---

1. This edition covers only hydrant and vehicle refuelling facilities.  
2. Refer to the standards in 6.1.1.  
3. Sub-contractor is the term used in typical fuel contracts between the fuel provider and aircraft operator.

- a) the manual and operating procedures of the contractor/fuel supplier;
- b) the contractor/fuel supplier's records on quality control and checks of fuel; and
- c) the contractor/fuel supplier's services at the aircraft and operational standards of airport fuel storage distribution systems, including into-plane systems.

### 6.3 CHANGE MANAGEMENT — NOTIFICATION OF CHANGE

Aircraft operators, and airport operators to the extent that it will affect them and their users, shall<sup>4</sup> be notified of any change that could cause fuel supply interruptions or generate new or changed fuel hazards, including the potential for contamination. The notification shall be done before changes are made or any system reactivation. Examples of such changes are:

- a) major system modification;
- b) a supply system being taken out of service (including intrusive scheduled maintenance);
- c) new, additional, replacement or modified equipment; and
- d) interruptions in relevant refinery or distribution chains upstream of a specific airport storage facility.

Reference: SAE AS 6401 and ATA Specification 103. Additional information can be found in JIG Bulletin 39, and additional guidance on SMS can be found in ICAO Doc 9859.

### 6.4 RE-FUELLING OF AIRCRAFT — FUEL QUALITY CONSIDERATIONS

Adherence to correct processes and procedures for refuelling of on-specification aviation fuel is fundamental for the safe operation of an aircraft. The IATA *Guidance Material on Standard Into-Plane Fuelling Procedures*, Chapter 2, *Safety*, identifies mandatory precautions that must be taken prior to commencing refuelling. It is an aviation industry expectation that the applicable standards, as well as the terms of the agreement between the aircraft operator and the sub-contractor, will be followed before and during refuelling operations.

### 6.5 FUELLING VEHICLES — TECHNICAL AND FILTRATION REQUIREMENTS

#### 6.5.1 Fuelling vehicles — General

Reference to vehicle technical requirements can be found in EN 12312-5 or, amongst others, SAE Committee AE-5 (Aerospace Fuel, Oil and Oxidizer Systems) documents:

- a) ARP 5818;
- b) ARP 5918;

---

4. Refer to the standards in 6.3.

- c) AS 5877A; and
- d) AS 6401.

### 6.5.2 Fuelling vehicles — Filtration

All jet fuel fuelling vehicles shall<sup>5</sup> be fitted with at least the following filtration equipment, meeting the appropriate and latest edition specification of:

- a) filter monitors — EI 1583; or
- b) filter water separators — EI 1581; or
- c) a three-stage filter system — EI 1581 (for filter water separators) and EI 1583 (for filter monitors).

Where fuelling equipment is equipped with filter water separators, a system to detect free water in the sump should be installed. Additional information on filtration can be found in EI 1550.

---

5. Refer to the standards in 6.5.2.





## Appendix 1

### ORGANIZATIONS INVOLVED IN THE DRAFTING OF THIS MANUAL

**IATA and A4A** — Joint leaders of the IATA TFG task force that drafted the technical fuel content.

#### Workgroups

1. **Supply group** — All aspects from refinery up to supply to airport storage:

- a) Air BP (lead);
- b) Exxon Mobil;
- c) Shell Aviation;
- d) United Airlines;
- e) Platinum Fuels;
- f) PAMAS GmbH; and
- g) American Airlines (initial work).

2. **Storage group** — Airport storage and hydrant systems:

- a) UPS (lead);
- b) Q8 Aviation;
- c) Exxon Mobil;
- d) World Fuel Services;
- e) Delta Air Lines;
- f) Bharat Stars Services Pvt Ltd; and
- g) British Airways.

3. **Provision group** — All vehicles, pressure control and into-plane:

- a) Lufthansa (lead);
- b) Servisair;

- c) Airbus;
- d) KLM;
- e) Austrian Airlines;
- f) Cathay Pacific Airways (initial work); and
- g) AFS Germany.

ICAO collaborated with IATA and ACI during work on development of this manual providing input, including that from the ICAO Aerodrome Operations and Services Working Group of the Aerodromes Panel.

In addition to the specific task force members, other affiliated organizations, such as JIG, EI, and IATA IFQP were involved.

---

## Appendix 2

### REGULATORY PRACTICES IN STATES (RESERVED)

1. ICAO is seeking examples of effective regulatory oversight of the supply chain from States, particularly examples of those where the scope covers that part of the supply chain from arrival in State to airport fuel depots and those:
  - a) of non-aviation regulatory bodies, taking account of those parts of the supply chain that are generally outside the remit of civil aviation safety regulators;
  - b) that use less burdensome but effective performance-based regulation;
  - c) where the oversight arrangements have proven to be effective while imposing minimal burden on industry and using minimum State resources, for example using the results of other audits such as those conducted by independent fuel or aviation industry auditors;
  - d) that include requirements for the mandatory reporting of fuel quality related occurrences; and
  - e) regulatory arrangements when either an aircraft or airport operator also engages in fuel handling or provision.
2. On receipt of this information ICAO will consider including information on State regulatory roles in an amendment to, or a future edition of, this manual.

— END —





ISBN 978-92-9249-105-5



9 7 8 9 2 9 2 4 9 1 0 5 5